

"Economical & simple"

REBA



GRAH[®]
LED LIGHTING

INDUSTRIAL


REBA



Economical & simple

Reba is an economical, simple and quality made luminaire designed to be used for arcades, façades, residential areas, terraces. The housing is made from highly resistant thermoplastic and weighs only 1 kg.

TECHNICAL SPECIFICATIONS

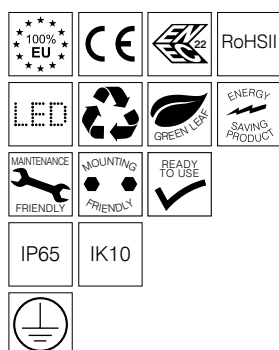

Supply voltage range:	220-240 V, 50 / 60 Hz
Consumption:	11 W
Temperature range:	-30°C / +60°C
Working temperature at Ta25:	+55°C
Light source:	Mid power LED
Colour temperature:	3000 K, 4000 K
System efficacy:	Up to 130 lm/W
LED Lifetime:	Up to 50.000 hours, L70 at Ta25
Colour Rendering Index:	CRI>80
System efficacy:	127 lm/W
Lumen flux:	1.400 lm
Appliance class:	I
Housing material:	High resistant termoplastic
Cover material:	PC-Polycarbonate
Housing colour:	White
Protection class:	IP65
Shock protection:	IK10
Mounting options:	Ceiling, wall
Suggested mounting height:	Up to 3 m
Dimension (Ø x H):	270 x 91 mm
Net weight:	1 kg

5 year warranty



Multi-purpose LED lamp

IK10 shock protection

REBA



ID number	Lum. flux [lm]	Colour Temp.[K]	Power [W]	Efficacy [lm/W]
2132-0014-1003-6591	1400	3000	11	127
2132-0014-1004-6591	1400	4000	11	127





GRAH LIGHTING d.o.o.
Zadružna ulica 6,
SI-2310 Slovenska Bistrica,
Slovenia, EU

+386 82 801 424
info@grahlighting.com
www.grahlighting.com